

Constructability & Financial Analysis Final Report

2024 RTEP Window 1

For Public Use

#	ID	Proposing Entity	Focus Area	Project Title	Submitted Cost ($M)
76	300		0	Yeat-Vontay	$381.73
77	350		AEP - 3/4	Jester-Hayden	$229.41
78	610		0 & DOM - 1	Portfolio #3	~$3,700.00
79	617		0	AEP incumbent upgrades for Portfolio #4	$167.35
80	636		0 & DOM - 1	Portfolio #2	~$3,900.00
81	665		0	Joshua Falls-Vontay-Morrisville South	$1,188.51
82	694		ATSI	Fostoria Central-Lake Ave. 345 kV DC	$328.37
83	759		0 & DOM - 1	Portfolio #1B	$4,827.12
84	820		0	765 kV Joshua Falls-Yeat	$1,016.90
85	24	VEPCO	DOM - 1	230 kV and 115 kV Solutions for Portfolios	$861.74
86	261		DOM - 1	Overdutied Breaker Replacement	$70.78
87	390		DOM - 1	230 kV Safety Solutions (Optional reinforcements depending on selected proposals)	$1,008.58
88	527		DOM - 1	500 kV and 230 kV Cap Bank and STATCOM Installation (Required/discretionary depending on selected proposals)	$322.00
89	761		DOM - 1	138/115 kV Safety Solutions (Optional reinforcements depending on selected proposals)	$104.07
90	781		DOM - 1	500 kV Solutions for Portfolios	$161.68
91	873		AEP - 1	Line 8 Rebuild – Bremo to Scottsville Interconnection (APCO)	$42.10
92	967	VEPCO	DOM - 1	DVP Central Area Improvement for Portfolios	$1,189.78
93	980		DOM - 1	500 kV Line #579 EOL Rebuild Septa — Yadkin	$216.78
94	983		DOM - 1	500 kV Safety Solutions (Optional reinforcements depending on selected proposals)	$2,839.36

Regional Proposal Components

Of the 94 proposals received, 31 proposals (or 33%) included components that would address the regional need(s) and were assigned to focus areas "0" or "0 & DOM – 1." Furthermore, of those 31 proposals, 18 of the proposals (almost 20% of the total number of proposals submitted) were what PJM considers scenarios, assigned to focus area "0 & DOM – 1," intended to address the majority of regional violations. The scenario proposals were proposed by CNTLTM (LS Power), NEETMH (NextEra) and TRNSRC (Transource). The Transource scenario joint proposals represent a collaborative effort by the incumbent TOs (Dominion, FirstEnergy and Transource), and are portfolios including several incumbent TO proposals along with the Transource greenfield component proposals. **Table 2** and **Table 3** organize the backbone proposal components into Regional Clusters.

Table 2. Regional "0" Cluster


Proposal ID	Proposing Entity	Major Components
727	KEYATC	Kammer-502 Junction 765 kV line
551	POTOED	Chanceford-Goose Creek 500 kV line
708	TRAIL	Amos-Welton Springs-Rocky Point 765 kV line

Proposal 533 – NEETMH (NextEra)

NextEra Proposal No. 553 (**Map 33**), described as Lemoyne-Lake Ave. 345 kV, includes constructing a 76-mile, single circuit 345 kV line from ATSI's Lemoyne substation to Lake Ave. substation, installing one new 345 kV breaker at Lemoyne substation to terminate a new line, and adding a new bay at Lake Ave. substation to terminate new line.

NextEra Proposal No. 553 has a total of three components, which include two substation upgrade components and one 76-mile greenfield transmission line component.

Map 33. Proposal 533

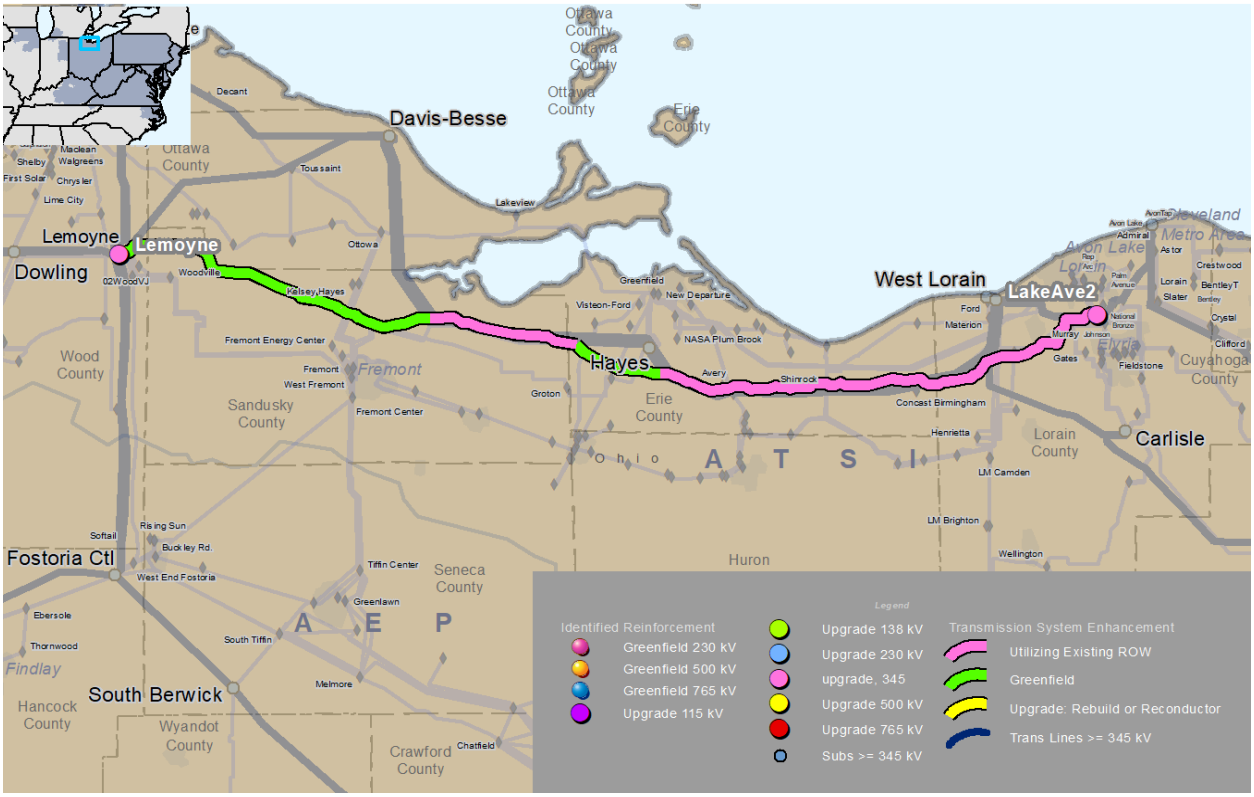

*NOTE: This map is only intended to illustrate the general electrical connectivity of the projects and should **not** be relied upon for exact geographical substation locations or line routes.*

Project Overview


NextEra Proposal 533 includes the following components for the Ohio solution:

- Component 1: Lemoyne-Lake Ave. 345 kV line
- Component 2: Lemoyne substation expansion
- Component 3: Lake Ave. substation expansion

Ohio Cluster Proposals: PVRR Comparison

Figure 6 compares the base case costs of all Ohio Cluster proposals, grouped by proposer.

Figure 6. Ohio Cluster Proposals: Base Case PVRR Comparison

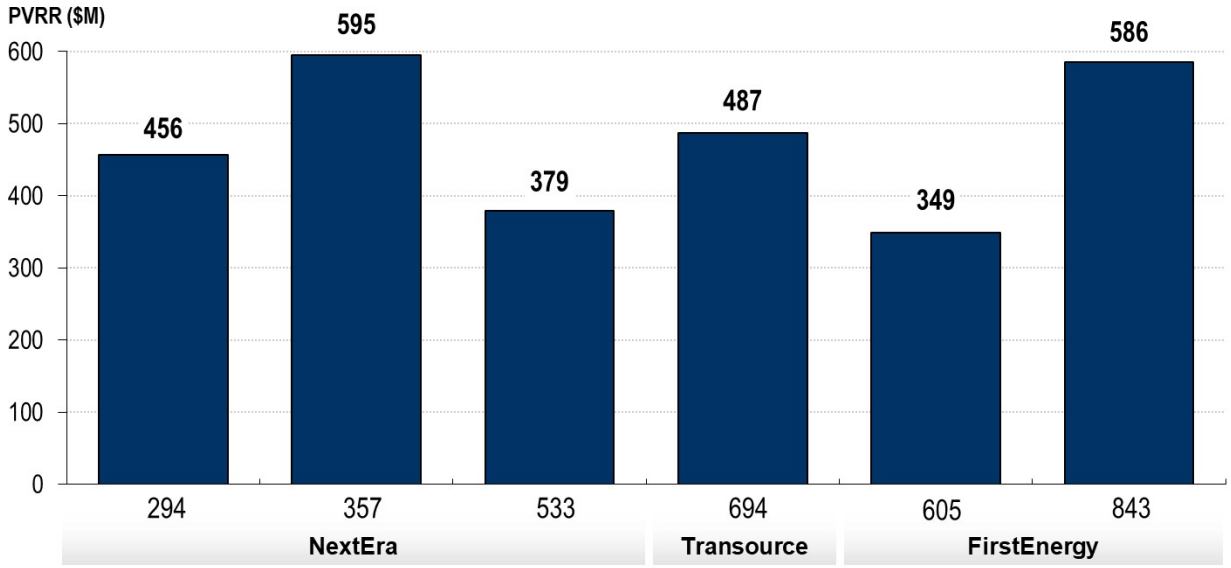

The Ohio Cluster projects are similar enough in scope to be comparable in terms of PVRR.

FirstEnergy's Proposal 605 is the best performing ATSI zone proposal in terms of cost, even without cost containment, due to its low base cost. It has the lowest PVRR in all modeled sensitivities.

NextEra's Proposal 533 performs second best in all sensitivities, with a slightly higher PVRR than 605 in each sensitivity, followed by Transource's 694.

FirstEnergy's 843 and NextEra's 357 perform similarly in most sensitivities.

Table 42 shows the volatility of ATSI zone project costs across modeled sensitivities relative to base case costs. Costs are shown in millions of dollars, allowing for a simple comparison of absolute cost volatility.